

# OA2416 rangehood

stainless steel retractable, twin motor

ID150710  
60cm code 3128  
90cm code 3137



<b>FINISH</b>	white enamel body, stainless steel front rail
<b>SIZE</b>	60cm and 90cm
<b>INSTALLATION</b>	built into overhead cabinetry
<b>MOTOR</b>	2 x 100 watt single shaded motor with impellor
<b>CONTROLS</b>	front mounted, right
<b>SPEEDS</b>	3 settings — OFF (telescopic deflector shut, LOW, MID, HIGH
<b>ILLUMINATION</b>	two 40 watt SES tubular globes, separate on/off switch
<b>NOISE</b>	48–58 dB
<b>AUTOMATION</b>	preset fan speed and light
<b>CAPACITY</b>	280m <sup>3</sup> /hr
<b>FILTER</b>	one-piece, 4-ply aluminium grease filter (removable)
<b>AIR EXTRACTION</b>	ducted or recirculated (125mm diameter pipe required)
<b>OPTION</b>	activated charcoal filter, 60cm code CF3061, 90cm code CF3062
<b>WARRANTY</b>	two years parts and labour

## AUTOMATION

Preset fan speed and/or lights to operate automatically when rail is pulled outward. At all times this can be overridden and operated manually.

## APPLICATION

Mounted above cooktop in cupboard, suspended from shelf in cabinetry cavity. Retractable front fascia rail is fully integrated into cupboard line when rangehood is not in use. Front rail is replaceable by decor strip.

## PERFORMANCE

Highly-efficient air extraction of up to 350 cubic metres an hour further enhanced by large catchment area when all-metal visor is telescoped outwards.

## MAINTENANCE

Easy lift-out grease filter is washable; removable light diffuser for bulb access. All clean lines for wipe-over maintenance.

## QUIETNESS

39–64 dB. The motor/impellor encasement and flues are all smooth-walled to minimise air drag and hence noise, welded metal joints for no vibration.

## SAFETY

Thermal overload protector on motor; fire-retardant hardened metal and mesh. VO self-extinguishing polycarbonate for motor housing and internal flue.

## DUCTING

Ideally the extracted air is ducted direct to the atmosphere via the top exit. This direct ducting ensures maximum removal of the grease, oil particle-laden vapour and, importantly, the removal of the heat and odours, resulting in a more comfortable cooking environment.

## DUCTING MATERIAL

Smooth internal walled duct pipe lengths ensure the most efficient air movement and quieter operation. Consider either high temperature rated PVC or galvanised sheet metal piping. The flexible ducting can be ideal for a very short tight run.

## RECIRCULATING

When the cooking vapours cannot be ducted, simply redirect the extracted and filtered air into the kitchen via a duct pipe through the overhead cabinetry. A more frequent inspection and cleaning of the grease filter is recommended.

## CHARCOAL FILTER

A purchasable accessory and easily fitted within the grease filter, it effectively diminishes cooking odours in the recirculation mode. These filters are not to be washed and are replaceable.

## RAIL REPLACEMENT

The fitted stainless steel rail is easily removed and replaced by an optional white or black rail in either 60cm or 90cm lengths. These rails are purchasable accessories. Alternatively, the rail can be replaced by a cabinetry strip in the same material and colour as the adjacent surfaces — for instance, solid timber, laminated plyboard or polyurethane.

## WARRANTY


Two years parts and labour.

**omega**


# OA2416 rangehood

stainless steel retractable, twin motor


ID150710  
60cm code 3128  
90cm code 3137

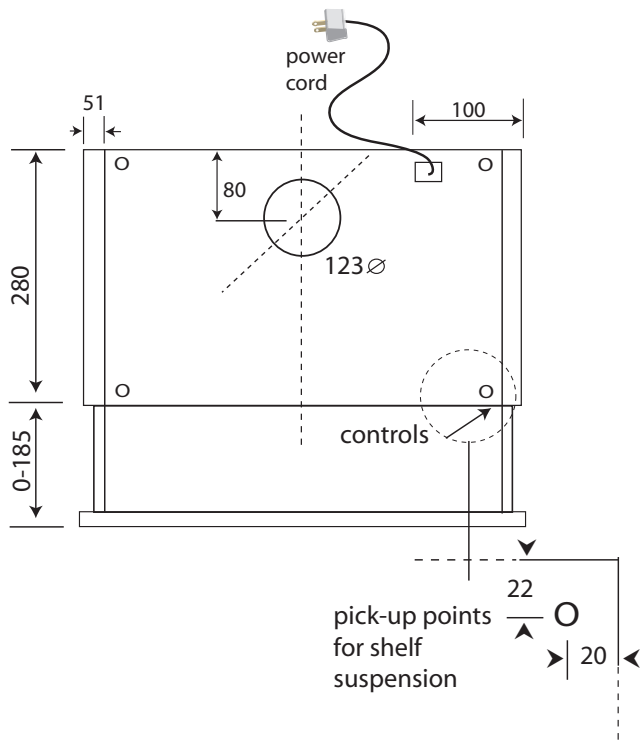


<b>height</b>	170mm
<b>width</b>	598mm, 898mm
<b>depth</b>	retractable visor 300mm/485mm
<b>packaged dimensions</b>	60cm: 645mm x 390mm x 255mm = 0.65m <sup>3</sup> 90cm: 945mm x 390mm x 255mm = 0.94m <sup>3</sup>
<b>net weight</b>	60cm: 9.6kg — 90cm: 12.8kg
<b>gross weight</b>	60cm: 10.7kg — 90cm: 14.3kg
<b>capacity</b>	280m <sup>3</sup> /hr
<b>noise rating</b>	48-58 dB
<b>electrical supply</b>	240 volt, 50 Hz
<b>electrical connection</b>	1.25m connected power cord with 3-pin suitable for standard 10 amp GPO
<b>motor</b>	single-shaded pole
<b>wattage</b>	motor: 100 watt light: 2 x 40 watt SES tubular globes total: 1800 watt
<b>maximum current</b>	1.0 amp
<b>air exit aperture</b>	123mm diameter for 125mm (5") dia duct pipe
<b>supplied</b>	<ul style="list-style-type: none"> <li>• template for mounting</li> <li>• spigot for duct pipe</li> <li>• screws</li> <li>• instructions for installation, operation and maintenance</li> </ul>

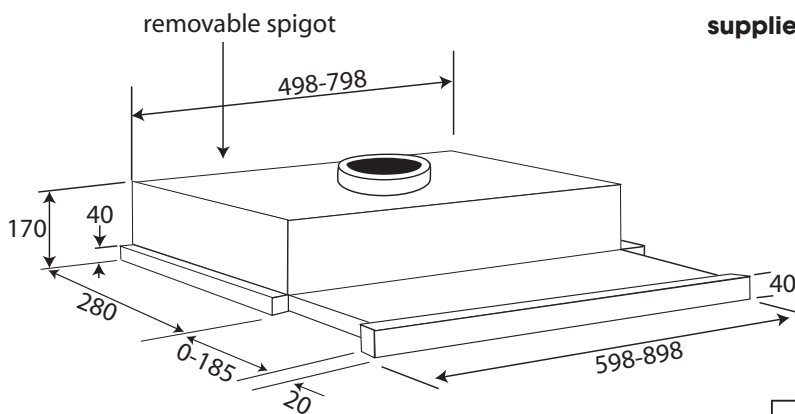

**NB: drawings are not to scale — they are to assist only**

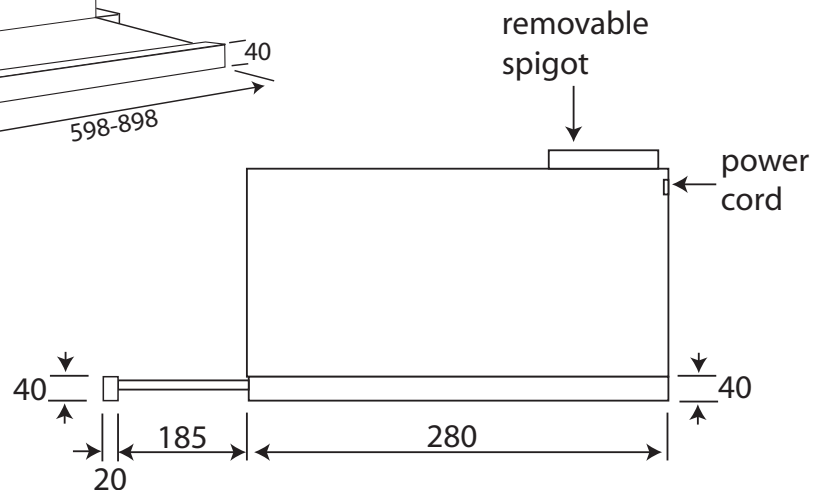

air filtering options

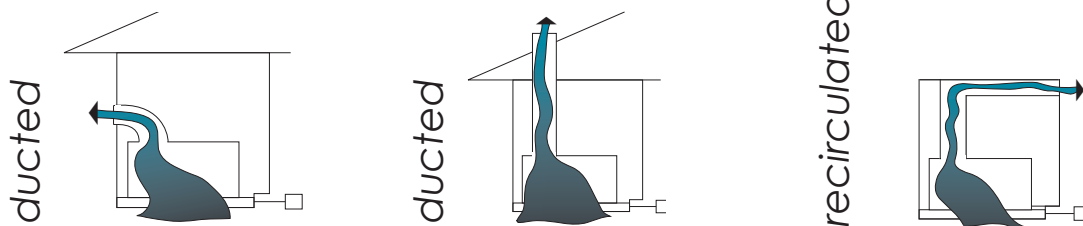

**WARNING:** technical specifications and product sizes can be varied by the manufacturer without notice. Cutouts for appliances should only be by physical product measurements. The above information is indicative only.

**omega**