

# omega dishwasher

60cm stainless steel freestanding dishwasher

ODW702XB



**finish**

silver control panel with stainless steel door

**installation type**

freestanding (removable worktop)

**capacity**

12 place settings

**wash programs**

6

**warranty**


24 months parts and labour

**water**

4.5 stars


**energy**

2.5 stars

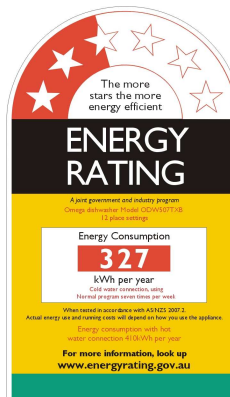

FEATURE	DETAILS / BENEFITS						
LCD display	provides count down timer display and program status indication						
loaded adjustable top basket	can be adjusted when fully loaded ; double stack side racks add flexibility						
six wash programs	<table border="0"> <tr> <td>quick 35min wash 40°C</td> <td>normal 55°C</td> </tr> <tr> <td>daily one hour 60°C</td> <td>pots intensive 65°C</td> </tr> <tr> <td>soak</td> <td>heavy 55°C</td> </tr> </table>	quick 35min wash 40°C	normal 55°C	daily one hour 60°C	pots intensive 65°C	soak	heavy 55°C
quick 35min wash 40°C	normal 55°C						
daily one hour 60°C	pots intensive 65°C						
soak	heavy 55°C						
half load wash	both baskets can be used with a half load wash to reduce the consumption time and water especially when a smaller load needs washing						
lockable control panel	locks in chosen programs and prevents tampering – child lock						
premium baskets	thicker, deeper and more durable basket frames add strength and longevity						
plate size	top basket allows 21cm to 26cm plates; bottom basket allows 25cm to 30cm plates						
triple filtration system	maintains wash performance and avoids bigger food particles re-entering wash system						
flexible basket tines	rear folding tines allows larger pots and pans to be washed with ease						
quick wash	lightly soiled plates can be washed in only 35 minutes						

## Technical Specifications

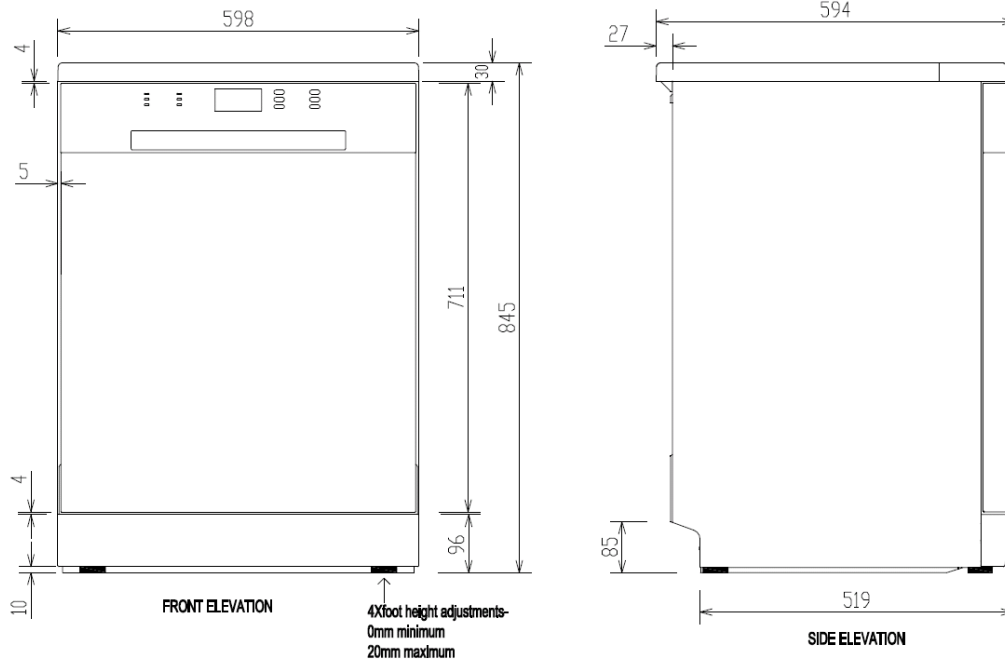

functionality	
place settings	12
height adjustable top basket	yes - loaded adjustable
wash temps °C	4 – 40, 55, 60, 65
delayed start	1 - 24 hours
allowable plate size (bottom basket)	30 cm
allowable plate size (top basket)	24 cm
drying efficiency	residual heat dry
safety	
lockable controls	yes
flotation device	yes
AquaStop safety hose	no
additional program options	
half load option	yes
DUALZONE	no
tablet wash	no

product details	
overall dimensions H x W x D	845 x 598 x 594
installation type	freestanding
control	electronic with red LCD display
countdown display	yes
noise	47 dBA
Weight (gross)	47kg
water	4.5 stars
energy	2.5 stars
connection	
power requirements	10 amp, 240v
water connection	cold water recommended
water pressure	400 to 1000 kpa
length of hose	1.9 meters
max water temp °C	60
warranty	
parts and labour warranty	24 months