

omega dishwasher

60cm fully integrated compact dishwasher *

OF1101XA



finish	stainless steel door and handle
installation type	built-in, fully integrated
capacity	6 place settings
wash programs	7
warranty	24 months parts and labour
water	2.5 star
energy	2 star



*This model comes with the door and handle pictured

*This model can be integrated using customer own panel and handle

*Please see user manual for integration instructions


FEATURE	DETAILS / BENEFITS								
can be integrated	the door and kick panel can be replaced with your own custom built panel to suit your choice of kitchen cabinetry								
compact and versatile	small enough to fit into the smallest of areas but big enough to provide a perfect wash for up to 6 place settings								
seven wash programs	<table> <tr> <td>quick 30min wash 40°C</td> <td>normal 55°C</td> </tr> <tr> <td>daily one hour 60°C</td> <td>pots intensive 65°C</td> </tr> <tr> <td>glass wash 40°C</td> <td>heavy 55°C</td> </tr> <tr> <td>soak/rinse</td> <td></td> </tr> </table>	quick 30min wash 40°C	normal 55°C	daily one hour 60°C	pots intensive 65°C	glass wash 40°C	heavy 55°C	soak/rinse	
quick 30min wash 40°C	normal 55°C								
daily one hour 60°C	pots intensive 65°C								
glass wash 40°C	heavy 55°C								
soak/rinse									
plate size	basket allows up to 25 cm plates								
triple filtration system	maintains wash performance and avoids bigger food particles re-entering the wash system								
rear fold down plate tines	adds loading flexibility by allowing bigger pots to be washed with ease								
two adjustable cup racks	mugs and cups can be washed with ease on this second tier rack								
quick wash	lightly soiled plates can be washed in only 30 minutes								

omega dishwasher

60cm fully integrated compact dishwasher *

OF1101XA

Technical Specifications

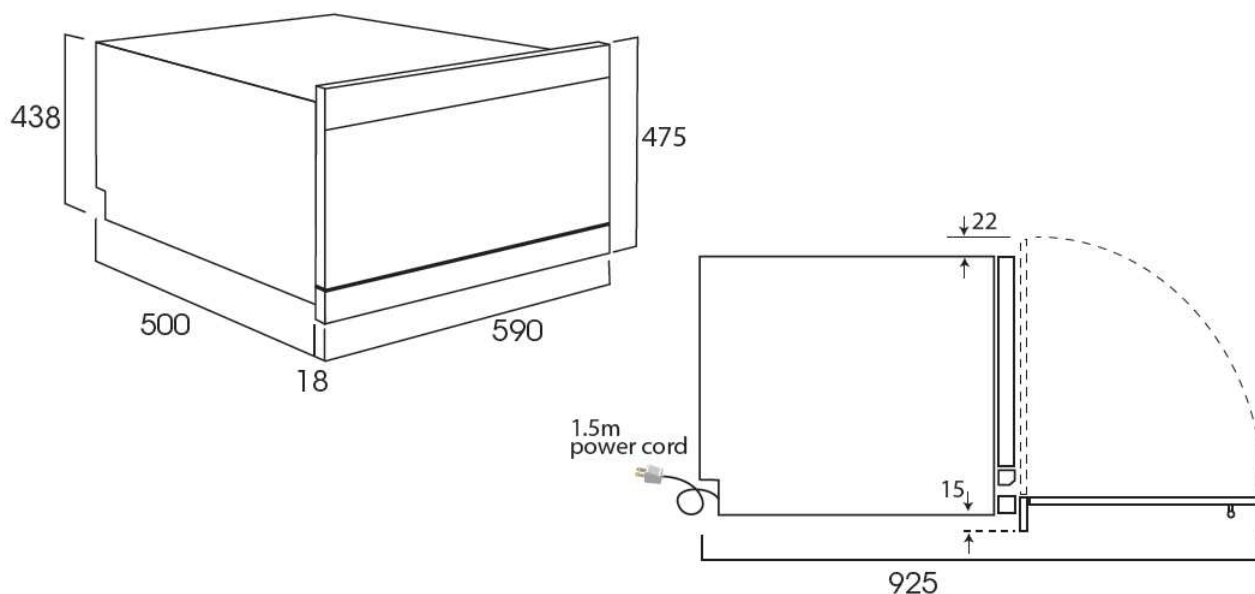

functionality

place settings	6
height adjustable top basket	no - single
wash temps °C	4 – 40, 55, 60, 65
delayed start	1 - 24 hours
allowable plate size (bottom basket)	25 cm
allowable plate size (top basket)	-
drying efficiency	residual heat dry

safety

lockable controls	yes
flotation device	yes
AquaStop safety hose	no

additional program options

half load option	no
DUALZONE	no
tablet wash	

product details

overall dimensions HxWxD	475 x 590 x 500
installation type	built-in, fully integrated
control	concealed
countdown display	no
noise	47dBA
Weight (gross)	28kg
water	2.5 stars
Energy	2 stars

connection

power requirements	10 amp, 240v
water connection	cold water recommended
water pressure	400 to 1000 kpa
length of hose	1.5 meters
max water temp °C	60

warranty

parts and labour warranty	24 months
---------------------------	-----------