



WATER RATING



ENERGY RATING



THIS DISHWASHER IS FULLY-INTEGRATED — ie DOORS SHOWN IN IMAGES ARE NOT INCLUDED WITH PRODUCT.

size	825mmH x 600mmW x 560mmD
installation	built-in only, underbench or elevated into wall cabinetry
capacity	12 placesettings (IEC international)
programs	seven
controls	concealed, horizontal return of door, fully electronic, illuminated touch pads, LED window
half load	top basket selection, all programs
delay start	24-hour maximum, one-hour increments
quietness	41 dB
water security	pex hosing, float switch
filtration	three stage
baskets	all grey bottom: 30cm diameter plate fit, collapsible dish racks top: height adjustable, double-stack side racks
warranty	two years parts and labour

INSTALLATION


The OFI602 is designed to be built-in only, whether conventionally underbench or at an elevated position anywhere within the kitchen cabinetry. Doors are constructed to complement surrounding cabinetry.

- 12-plate capacity, up to 30cm diameter plates
- plate size: 25.5-30cm diameter bottom basket
- 20.5-24cm diameter top basket
- height-adjustable top basket — double-stack side racks in top basket, cups or long-stemmed glasses
- seven wash programs —

Intense	70° Celsius
Heavy	50° Celsius
Normal	50° Celsius
Rinse	70° Celsius
Glass	50° Celsius
Rapid	50° Celsius
Soak	ambient
- half-load washing (top basket) on all programs
- two wash temperatures — 50°C, 70°C
- four rinse temperatures — ambient, 50°C, 60°C, 70°C
- two pre-wash temperatures — ambient, 45°C
- water consumption on Normal program — 15.8 litres
- residual heat hot air drying
- quietness: 55 dBA sound pressure at main (wash) motor
41 dB fully loaded and operating
- bottom basket with collapsible racks for easy loading of pots, pans, casseroles and baking dishes
- top basket with four flip-down racks for double stacking of cups, long-stem glasses, long cooking and serving utensils
- delay start, 24-hour maximum with one-hour incremental selections
- electronic controls and displays:
 - power ON/OFF, seven program touch pads, half-load button and light, rinse-aid low level light, 24-hour delay start button and LED window
- filtration in three stages, all removable:
 - initial horizontal stainless steel filter
 - middle vertical cylindrical stainless steel filter
 - final stainless steel micromesh filter
- wash action by traditional two wands:
 - lower wand in all-stainless steel
 - upper wand in all polypropylene by direct water feed from rear wall
- water connection by 90°C tolerant pex hose — cold or hot connection
- 150 watt wash motor
- 20 watt pump motor
- 2100 watt water heating element

PLEASE NOTE: drawings are not to scale. They are to assist only.

FRONT ELEVATION

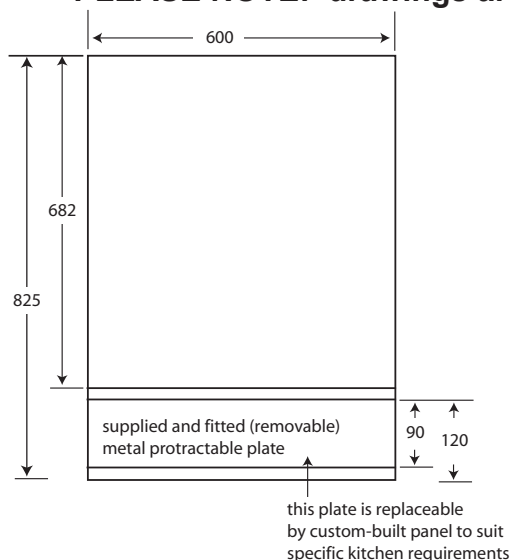

water mains pressure allowed —

minimum	maximum
5Ncm/2	1000Ncm/2
3psi	110psi
0.5bar	10bar

suitable for mains, gravity feed and tank pressures

water connection hot or cold —

pex hose tolerance	90°C
recommended max intake	60°C

electricity supply 240 volt 50 Hz

electricity connection 10 amp GPO

concealed element 2100 watt

wash motor 150 watt

pump motor 20 watt

max current 9.4 amp


packaged —

dimensions 885 x 620 x 635 = 0.35m³


gross weight 50kg

net weight 43kg

SIDE ELEVATION

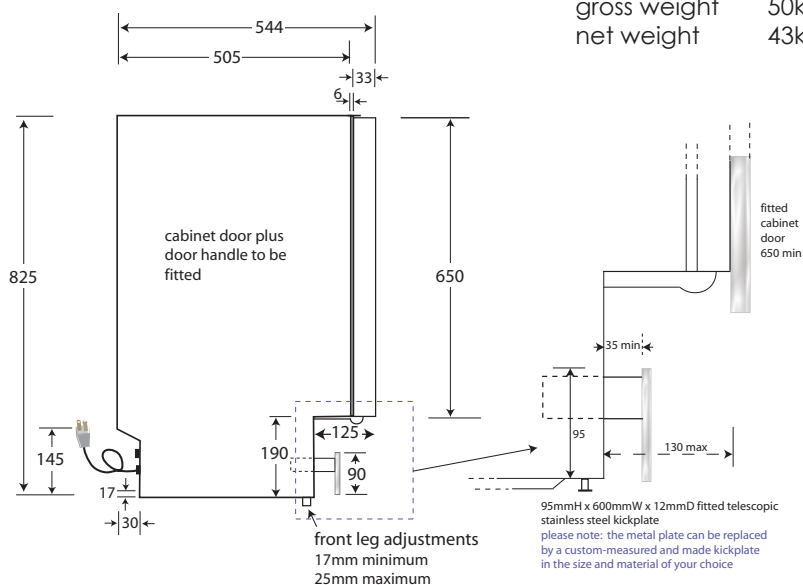

REAR ELEVATION — utilities

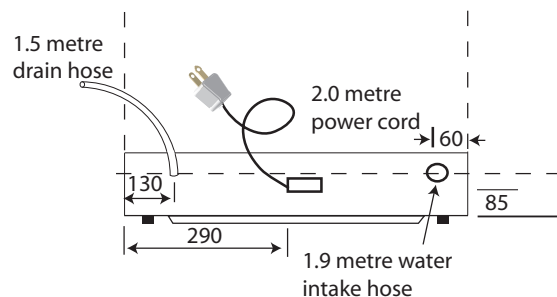

Program	Description	Symbol	Action				
			prewash	wash	cold rinse	hot rinse	drying
SOAK	progressive loading		ambient				
RAPID	lightly soiled dishes not needing drying		ambient	50°		50°	
GLASS	lightly soiled glasses, crystal, fine china		ambient	50°		60°	yes
RINSE	lightly soiled rinsing and drying only		ambient			70°	yes
NORMAL	normal soiling dishes & lightly soiled pans		ambient	50°	ambient	60°	yes
HEAVY	heavily soiled loads — pots, pans & dishes		2 x ambient	50°	ambient	70°	yes
INTENSE	heaviest soiled pots, pans, dishes, dried-on starch		45°	70°		70°	yes