

Here's to healthier water

Introducing a better way
to have freshly filtered water
always "on tap" at home.



Zip Chilltap®
for chilled filtered water

Zip Filter Tap™
for unchilled filtered water



Zip Chilltap[®]

for chilled filtered water

Zip Filter Tap[™]

for unchilled filtered water





A better way to have freshly filtered water always “on tap” at home.

Better tasting

- Enjoy crystal-clear great-tasting water always on tap.
- The Zip “Five Star” filter removes over 95% of bitter chlorine.



Far healthier

- Removes contaminants as tiny as one thousandth of a millimetre.
- Designed to remove more than 99.9% of the parasites cryptosporidium and giardia.



More convenient


- Eliminates the need to lift and carry heavy water bottles.
- Gives you back the fridge space wasted on bottled water.



Far thriftier*

- Power consumption cost for chilling = 15 glasses for 1 cent.
- Standby[^] power over 12 months for chilling unit = less than \$10


*Approximate cost estimates are based on common current power charges. Zip “Five Star” 28005 water filtration cartridge has a rated capacity of 7570 litres. That capacity is equivalent to filtering about 20 litres daily for about one year. It is recommended that filter cartridges be replaced at least once each 12 months. Annual cost of filter replacement on that basis amounts to less than four cents per litre.
[^]Standby power is considered to be when unit is not dispensing or filling, but running idle.

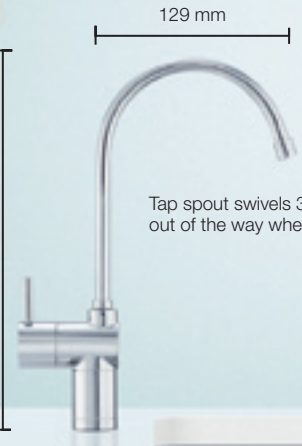

Tap spout swivels 360° so it is out of the way when not in use.



Rotate anti-clockwise to start water flow.
 Rotate clockwise to slow flow or turn off.

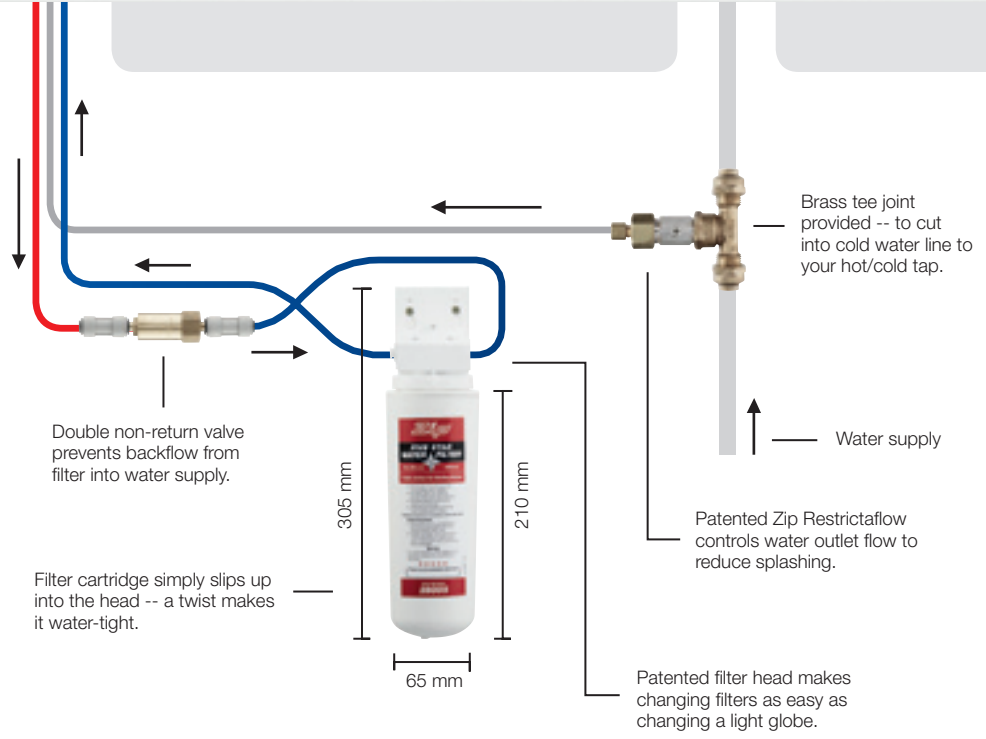

Brass tee joint provided -- to cut into cold water line to your hot/cold tap.

Water supply

Patented Zip Restrictaflow controls water outlet flow to reduce splashing.

Double non-return valve prevents backflow from filter into water supply.

Filter cartridge simply slips up into the head -- a twist makes it water-tight.

Patented filter head makes changing filters as easy as changing a light globe.

305 mm

210 mm

65 mm

Zip Filter Tap

for unchilled filtered water

Total surge protection for safer filter operation.

Unlike earlier water filtration systems, Zip Filter Tap is designed to protect the vital filter cartridge from damage due to pressure surges in the water supply. It has what is known to hydraulic consultants as a “vented system”. At no stage is the filter cartridge exposed to extreme pressure of any kind. This level of surge protection is essential for safe, effective and continuous water filtration.




Tap requires 25 mm hole 25 to 40 mm from sink edge. Can be installed flush to bench...



or with a tap collar supplied.



Zip “Five Star” filter cartridges are fully enclosed for quick, hygienic changes.

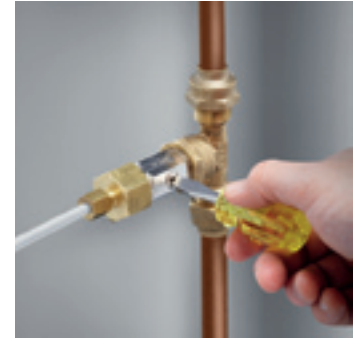

Rotating the Zip Restrictaflow valve also cuts off the water supply if required.

Zip Filter Tap for the home	Replacement filter cartridge
order code 59007	order code 28005



129 mm


270 mm

Tap spout swivels 360° so it is out of the way when not in use.

Tropic-rated, air-cooled, super-quiet chiller is located beneath the tap.

Initial draw-off rating is eight 200 ml glasses of chilled water at one time.

Recovery rate is sixty 200 ml glasses of chilled water per hour.

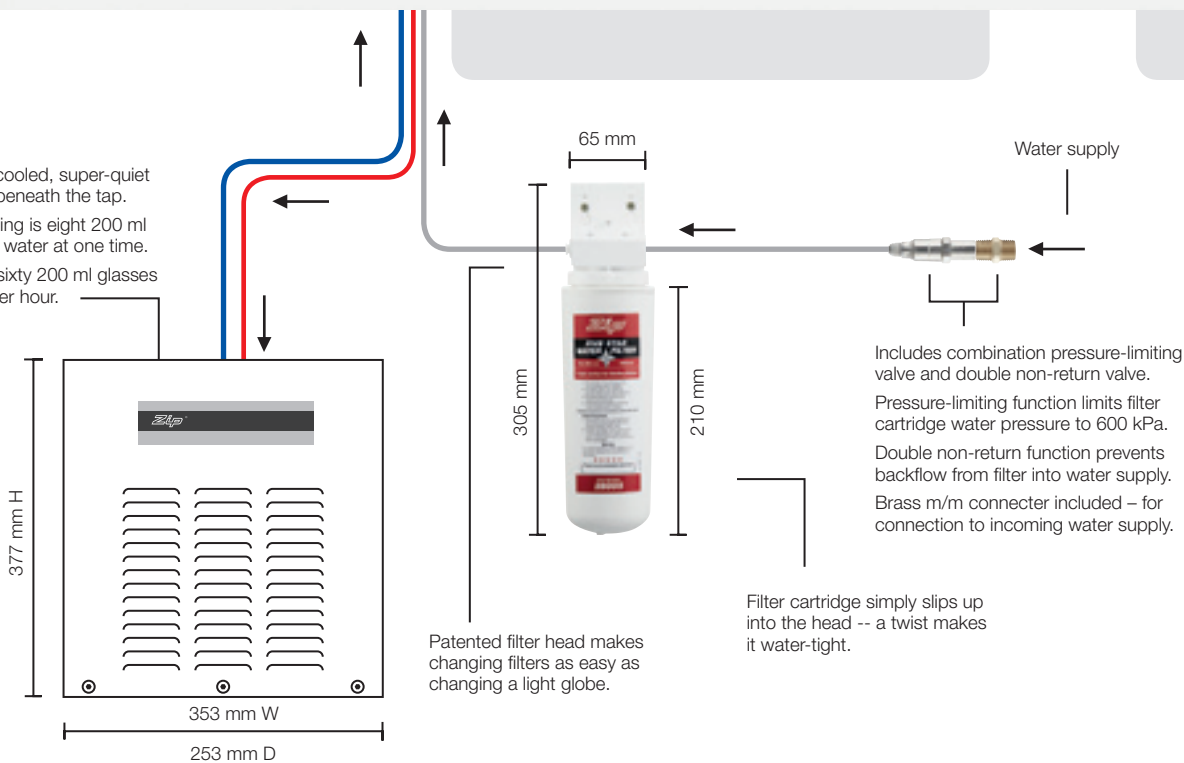

Water supply

Includes combination pressure-limiting valve and double non-return valve.

Pressure-limiting function limits filter cartridge water pressure to 600 kPa.

Double non-return function prevents backflow from filter into water supply.

Brass m/m connector included – for connection to incoming water supply.

Patented filter head makes changing filters as easy as changing a light globe.

Filter cartridge simply slips up into the head -- a twist makes it water-tight.

Note: under-sink unit can sit width or depth facing front

Zip Chilltap

for chilled filtered water

Water surge protection for both filter and chiller.

Zip Chilltap is designed to protect the vital filter cartridge and chiller from damage due to pressure surges in the water supply. The “vented system” and “pressure limiting valve” incorporated are designed to ensure that at no stage is the filter cartridge or chiller exposed to extreme water pressure. This level of surge protection is essential for safe, effective and continuous filtration.



Tap requires 25 mm hole 25 to 40 mm from sink edge. Can be installed flush to bench...



or with a tap collar supplied.



Long-life Zip “Five Star” filter cartridges usually need replacement only once each 12 months.



Rotate anti-clockwise to start water flow.
Rotate clockwise to slow flow or turn off.

Zip Chilltap for the home	Replacement filter cartridge
order code 76121	order code 28005



Zip Chilltap®

for chilled filtered water

Zip Filter Tap™

for unchilled filtered water

Need more information?

Contact your Zip “Five Star” filtration supplier.
Or call Zip Customer Care on 1800 42 43 44.

Zip Heaters (Aust) Pty Ltd
67 Allingham Street
Condell Park NSW 2200 Australia
Telephone +61 2 9796 3100
Facsimile +61 2 9796 3858
www.zipindustries.com

The terms “Zip”, “Filter Tap”, “Chilltap”, “Restrictaflow” and “Five Star” are trade marks. Copyright June 2009. Brochure 010709.

