



MODELS: GHP16, GHP17, GHP765

cooktop dimensions

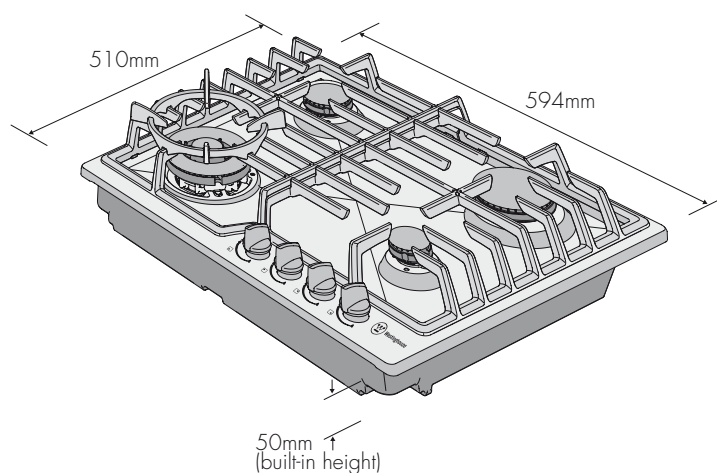

Note: Electrical connection
Requires 240V 10AMP power outlet

building-in cut-out dimensions

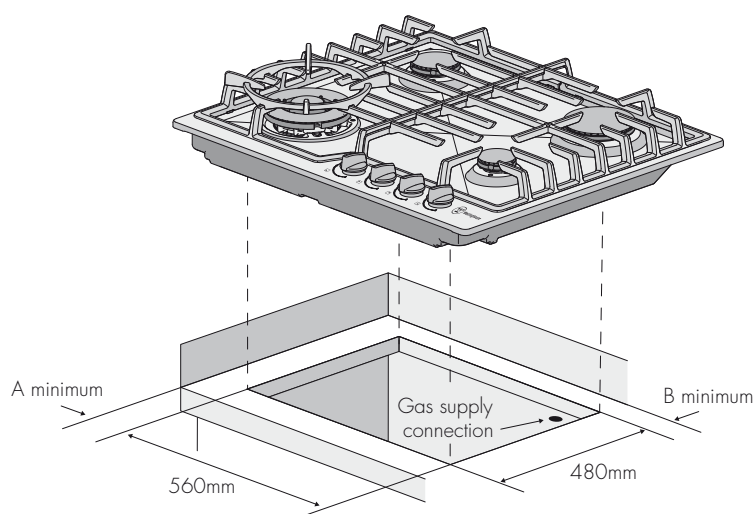

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.

These models are supplied with 10Amp plug and lead


minimum distance to combustible vertical surface

A	148mm
B	154mm

NOTE: All appliances must be installed to Australian Standard AS5601


MODELS: GHP95, GHP795

cooktop dimensions

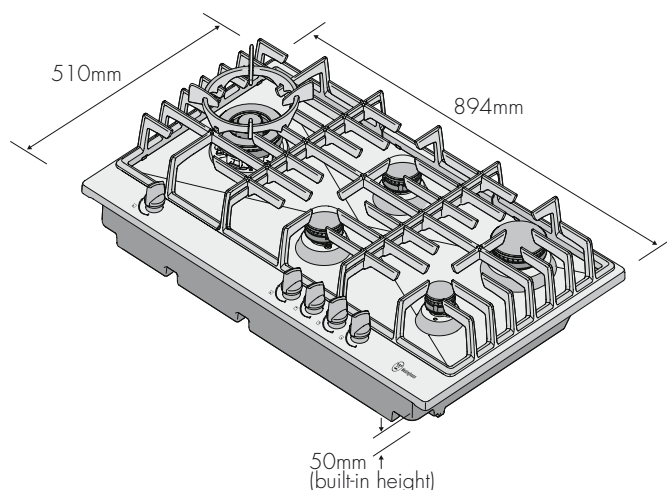

Note: Electrical connection
Requires 240V 10AMP power outlet

building-in cut-out dimensions

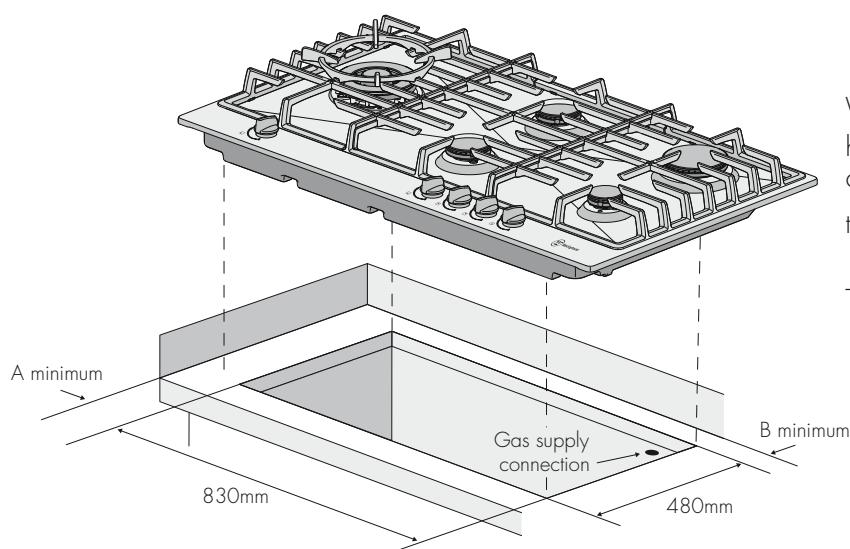

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.

These models are supplied with 10Amp plug and lead


minimum distance to combustible vertical surface

A	143mm
B	154mm

NOTE: All appliances must be installed to Australian Standard AS5601


MODELS: GHP775

cooktop dimensions

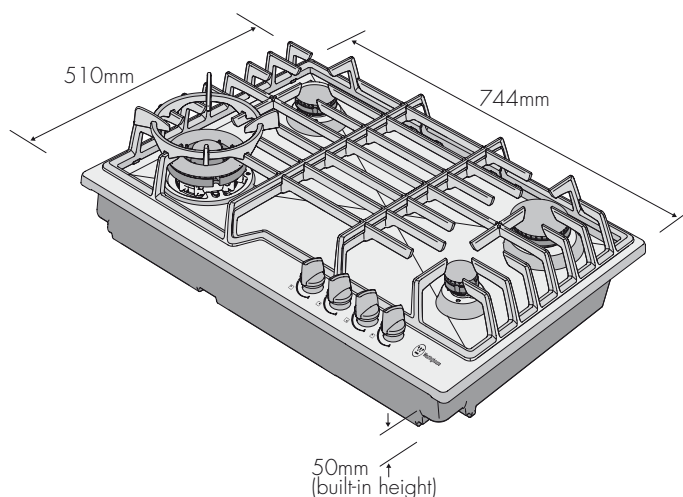

Note: Electrical connection
Requires 240V 10AMP power outlet

building-in cut-out dimensions

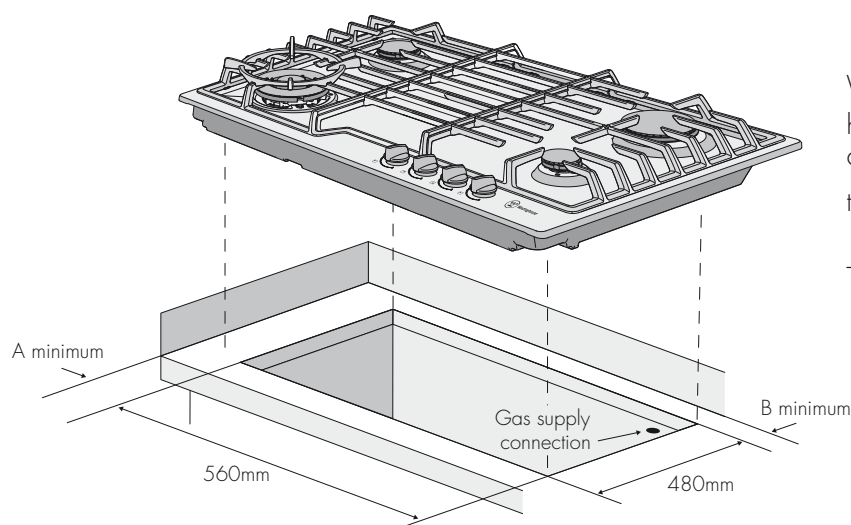

Walls around cooktop must be heat resistant for temperatures up to 90°C to a height of 150mm above the bench top.

These models are supplied with 10Amp plug and lead


minimum distance to combustible vertical surface

A	183mm
B	154mm

NOTE: All appliances must be installed to Australian Standard AS5601


MODEL: PHN668

cooktop dimensions

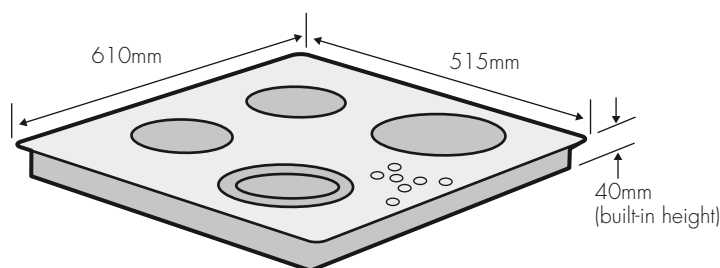

Note: Connection type – hardwired
Maximum power load 5.9kW

building-in cut-out dimensions

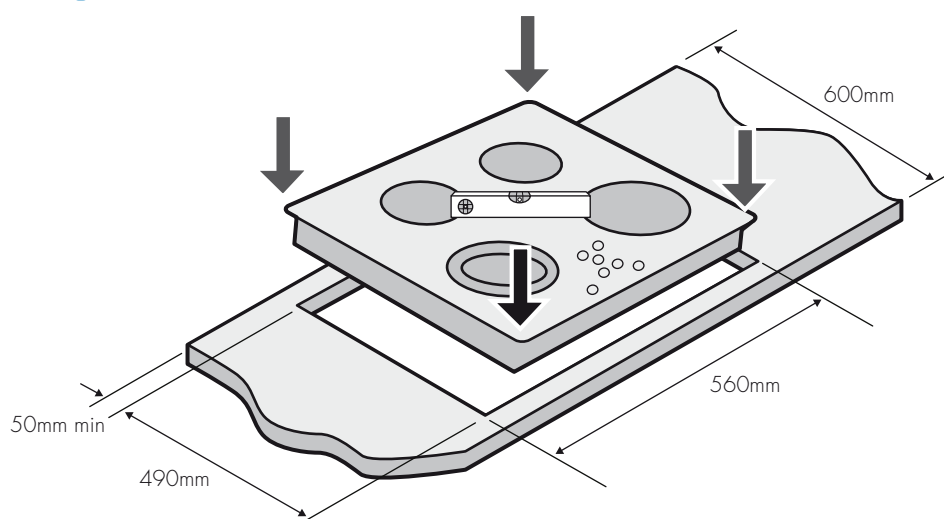


Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHN768

cooktop dimensions

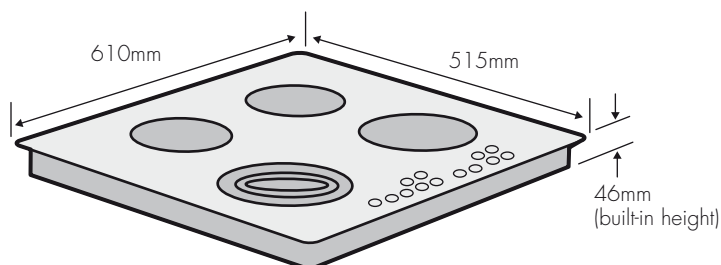

Note: Connection type – hardwired
Maximum power load 6.5kW

building-in cut-out dimensions

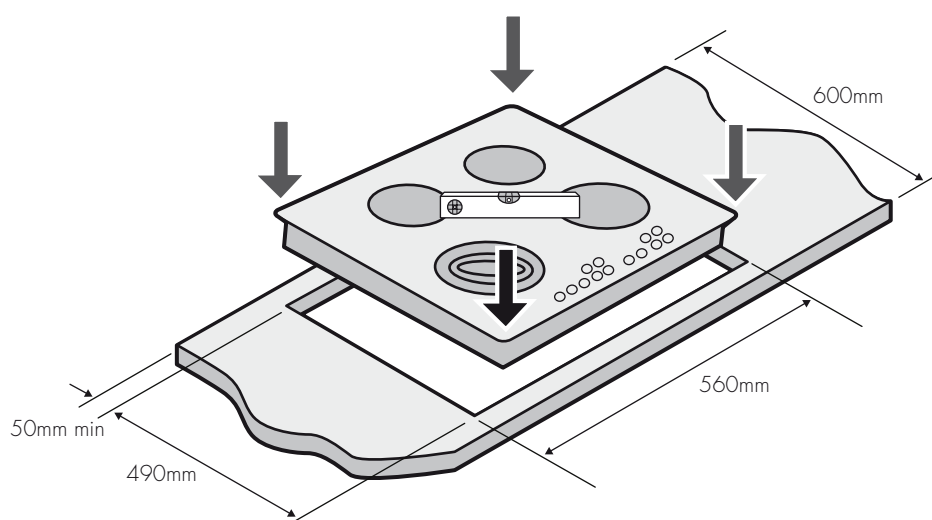


Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHN798

cooktop dimensions

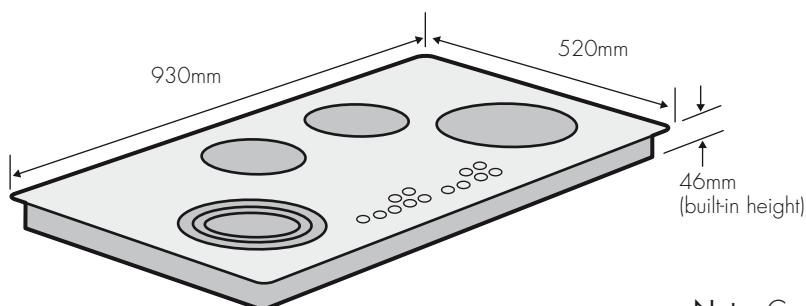

Note: Connection type – hardwired
Maximum power load 6.5kW

building-in cut-out dimensions

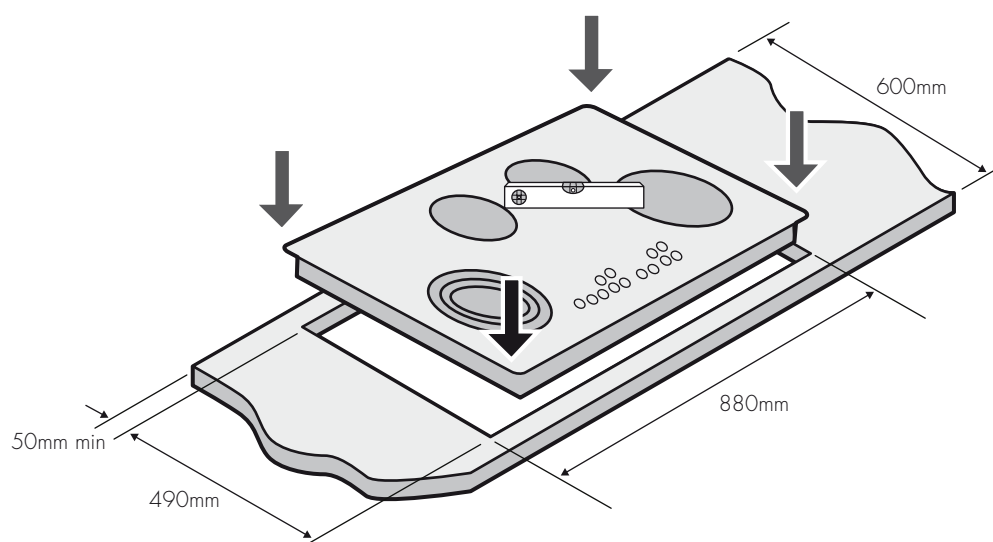


Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHP222

cooktop dimensions

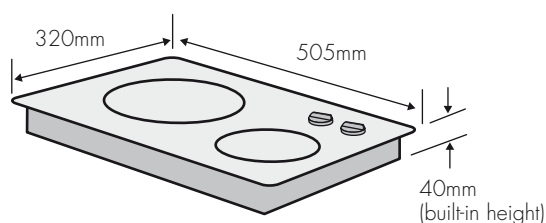

Note: Connection type – hardwired
Maximum power load 3.0kW

building-in cut-out dimensions

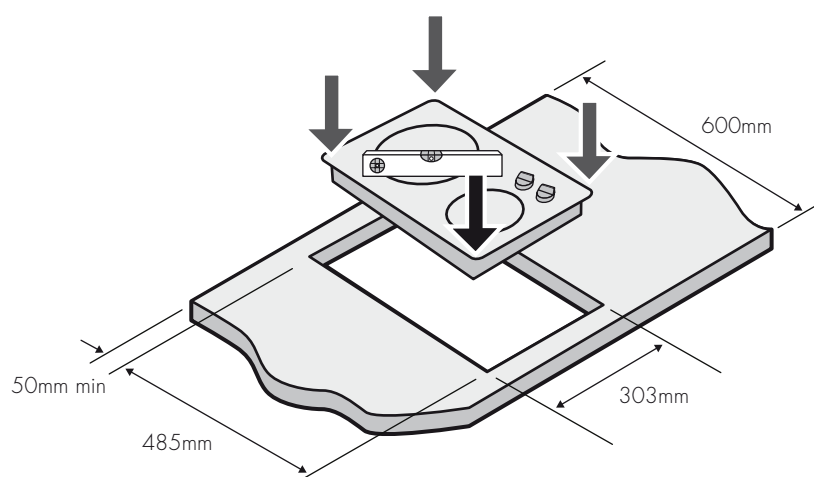


Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHP255

cooktop dimensions

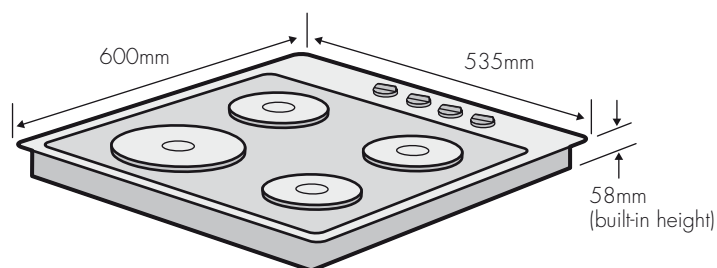

Note: Connection type requires 240V/20A power outlet


building-in cut-out dimensions

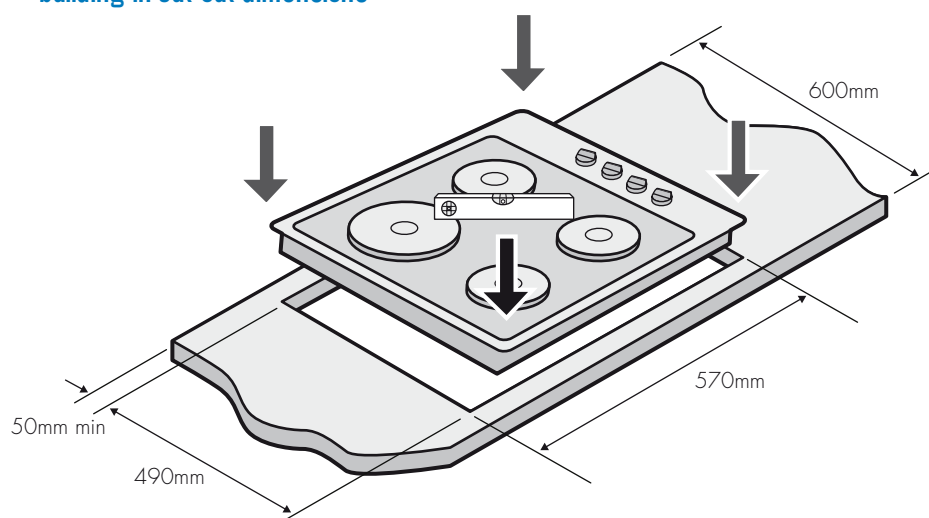

Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles


MODEL: PHP284

cooktop dimensions

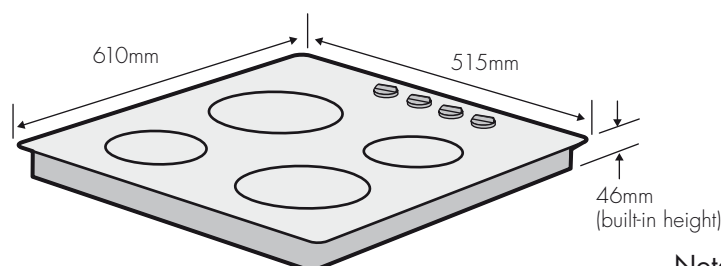

Note: Connection type – hardwired
Maximum power load 6.5kW

building-in cut-out dimensions

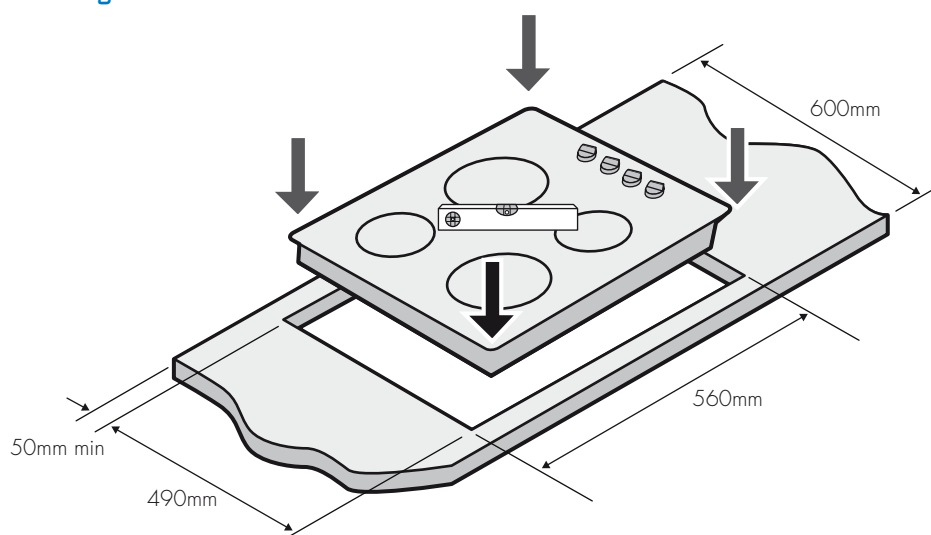


Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles.

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHP285

cooktop dimensions

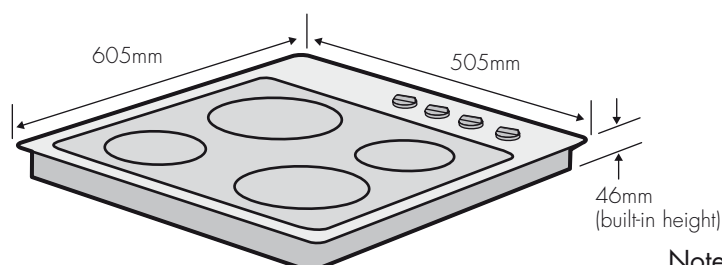

Note: Connection type – hardwired
Maximum power load 6.4kW

building-in cut-out dimensions

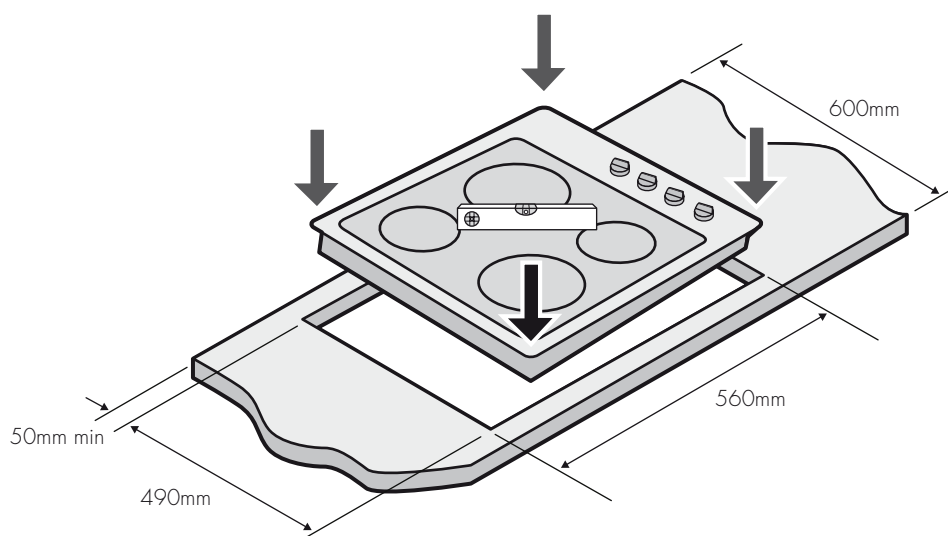


Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.


MODEL: PHP395

cooktop dimensions

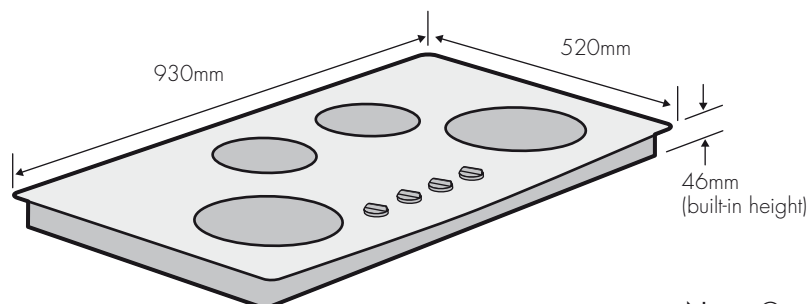

Note: Connection type – hardwired
Maximum power load 6.4kW

building-in cut-out dimensions

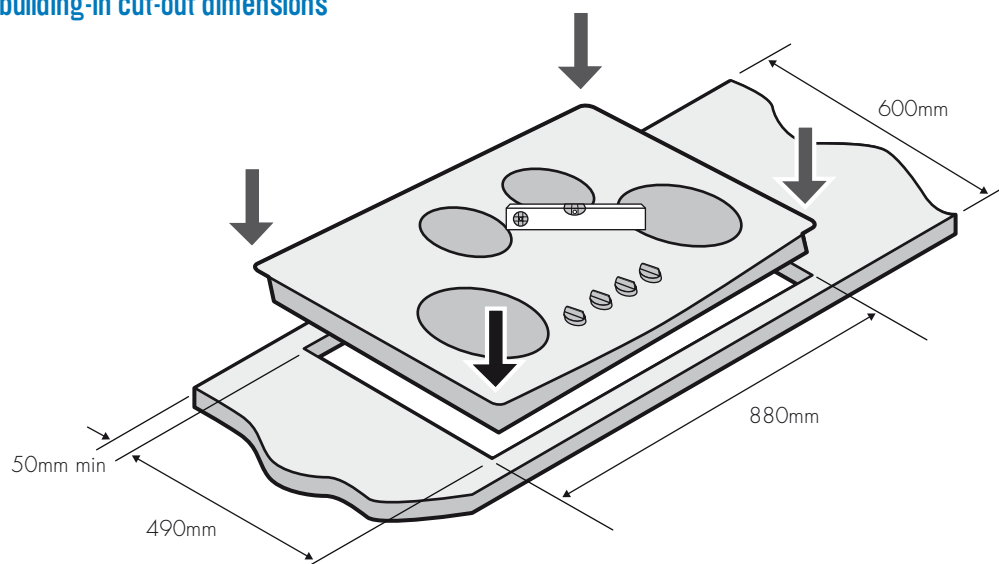

Note: Any walls surrounding the cooktop are to be heat resistant up to 90°C, up to 150mm high eg. ceramic tiles

Note: If a barrier is not required, a minimum gap of 30mm is needed under the cooktop.

Note: If the base of the cooktop can be touched from inside a cupboard or drawer, a barrier **MUST** be installed to prevent contact. The material for the barrier must be capable of sustaining heat up to 70°C. Make sure the barrier is at least 50mm and not more than 75mm below the base of the cooktop. The barrier is to have ventilation holes evenly spaced in the one of the following configurations: 25 x 25mm diameter, 15 x 35mm diameter or 6 x 50mm diameter.